



MEASURED CURRENTS:  
 +48V: 50mA  
 +5V: 186mA  
 +16V: 193mA  
 -16V: 197mA

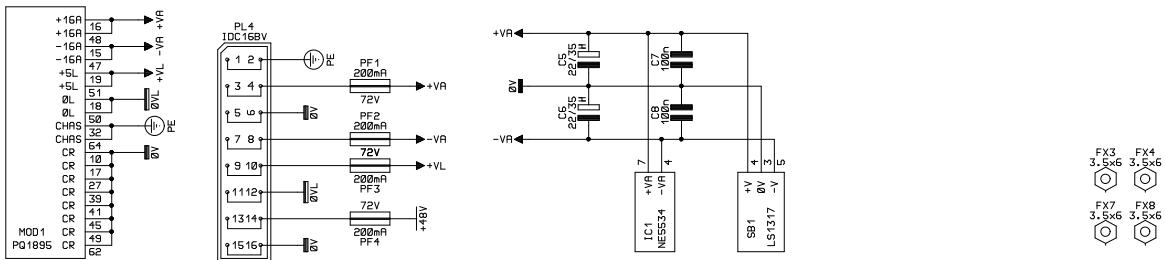

BOARD
ASBY BY
TESTED BY
SERIAL No.



- KEY:
- ELECTROLYTIC POLYSTYRENE
  - POLYESTER TANTALUM
  - CERAMIC NON-POLARISED
- GROUND / 0V SYMBOLS
- 0V MAIN
  - 0V5 SIDE CHAIN
  - 0V1 LOGIC
  - 0V1 METER POWER
- LEVEL REL. 0dBu
- LEVEL CHANGE
- CONTROL LIMITS
- PHASE ANTIPHASE
- DC CONTROL
- LOGIC TRANSITION
- 0.25W 1x MF 0.1W 1x SMD
- 0.25W FUSIBLE POWER RESISTOR



CML AUDIO SOLUTIONS,  
 UNIT 9A,  
 TOPLAND COUNTRY BUSINESS PK,  
 CRAGG ROAD,  
 MYTHOLMOYD, HEDDEN BRIDGE,  
 WEST YORKSHIRE,  
 HX7 5RN, ENGLAND.  
 TEL/FAX: 01422-885-196  
 E-MAIL: DESIGN@CML-AUDIO.CO.UK

WEB: WWW.CMLAUDIO.COM

CML AUDIO SOLUTIONS OWNS  
 COPYRIGHT OF THIS DRAWING,  
 WHICH MAY NOT BE COPIED,  
 REPRODUCED OR DISCLOSED,  
 BY ANY MEANS WHATSOEVER,  
 IN PART OR IN WHOLE,  
 TO A THIRD PARTY  
 WITHOUT WRITTEN PERMISSION

PROJECT:

SUPPORT CARDS

TITLE:

M-SERIES PQ  
 BACKING CARD

DRAWING NO.

ISSUE	DATE	SIZE
1	..-.-..	A3

SHEET OF SHEETS

DRAWN BY CHECKED APPROVED

GJC